

# TOTO®

# TS301A51 & TS301A61

## Traditional Collection Series B Single-Spray Showerhead

### FEATURES

- Maximum flow rate of 2.5 gpm (9.5 lpm)
- Single-spray showerhead
- Rubber nozzles to prevent limescale build up
- G 1/2" connection

### MODELS

- TS301A51  
4-1/2" showerhead  
4" diameter spray face
- TS301A61  
5-1/2" showerhead  
5" diameter spray face

### COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel

### CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



### PRODUCT SPECIFICATION

The single-spray showerhead shall have a maximum flow rate of 2.5 gpm (9.5 lpm). TS301A51 shall have a 4-1/2" showerhead and a 4" diameter spray face. TS301A61 shall have a 5-1/2" showerhead and a 5" diameter spray face. Product shall have a single spray. Product shall have rubber nozzles to prevent limescale build up. Product shall be TOTO Model TS301A\_\_\_\_ #\_\_\_\_.



TS301A51: Traditional Collection Series B Single-Spray Showerhead 4-1/2"



TS301A61: Traditional Collection Series B Single-Spray Showerhead 5-1/2"

**Please note the following component is sold separately:**



TS301N6: Shower Arm 6"

# TS301A51 & TS301A61




## Traditional Collection Series B Single-Spray Showerhead

### SPECIFICATIONS

- Warranty Lifetime Limited Warranty (Residential Use)  
One Year (Commercial Use)
- Material Brass / Plastics
- Shipping Weight TS301A51: 0.8 lbs.  
TS301A61: 1.0 lbs.
- Shipping Dimensions TS301A51 & TS301A61:  
3-1/2"L x 5-3/4"W x 6-3/4"H
- Maximum Flow Rate 2.5 gpm (9.5 lpm)

### INSTALLATION NOTES

OPTIONAL SHOWERHEAD COMPONENT:  
TS301N6: Shower Arm 6" sold separately.

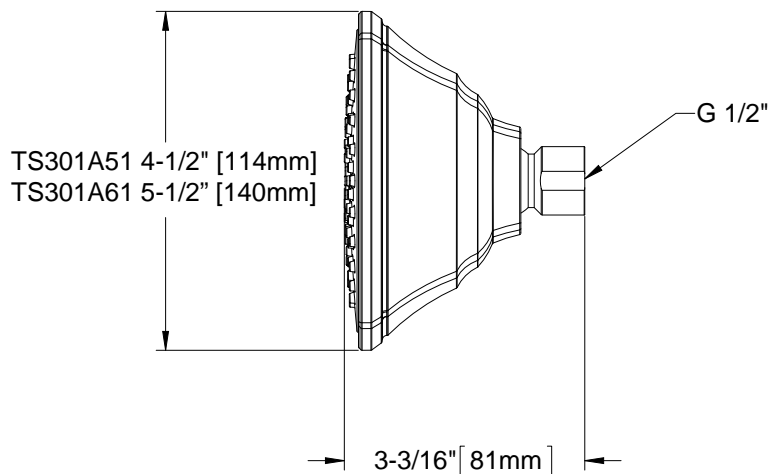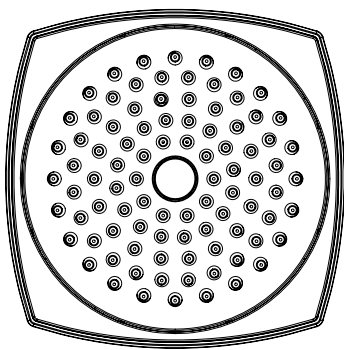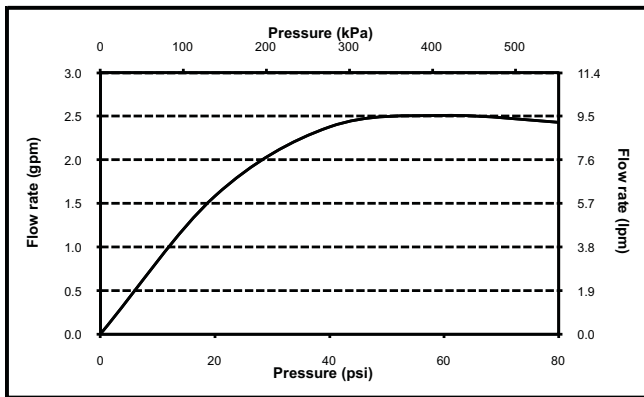

**TOTO**

*These dimensions and specifications are subject to change without notice*