TOTO®

MW6042034CUFG

UltraMax® II 1G® / WASHLET®+ C100 One-Piece Toilet - 1.0 GPF

FEATURES

- Concealed supply connection for seamless installation
- Ultra high-efficiency Tornado Flush® (1.0GPF/3.8LPF)
- CeFiONtect® glaze prevents debris from sticking to ceramic surfaces for easy cleaning
- Universal Height
- Elongated front bowl
- Decorative one-piece design with high-profile tank
- Chrome trip lever
- 12" Rough-in, less supply
- See Spec sheet SW2034T20 for Washlet features

MODELS

CST604CUFGT20 With CeFiONtect glaze

REQUIRED WASHLET+

SW2034T20 WASHLET®+ C100 Fits TOTO WASHLET+ toilet bowl models only

COLORS/FINISHES

Standard #01 Cotton

PRODUCT SPECIFICATION

The one-piece ultra high-efficiency Tornado Flush toilet shall be 1.0GPF/3.8LPF.

Universal Height Toilet with CeFiONtect glaze finish. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever.

Toilet shall be TOTO Model CST604CUFGT20#01.

See TOTO Specification sheet **SW2034T20** for details on required Washlet.





CeFiONtect

wasнье́т. +



Tornado Flush

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)









Ultramax® II 1G® / Washlet®+ C100 One-Piece Toilet - 1.0 GPF

SPECIFICATIONS

Water Use
Flush System
Min. Water Pressure
Water Surface
Trap Diameter
Payeds in
1.0 GPF/3.8LPF
8 psi (static)
7-1/8" x 9-1/8"
2-1/8"

Irap Diameter 2-1/8"
Rough-in 12"
Trap Seal 2-1/8"

• Warranty One Year Limited Warranty

• Material Vitreous china

 Shipping Weight CST604CUFGT20 99lbs. SW2034T20 16.0lbs.

Shipping Dimensions CST604CUFGT20

32"L \times 20"W \times 17-3/4" H¹ \times

28-3/4" H² SW2034T20


23 1/2"X 20 1/2" X 9"

• See Spec sheet **SW2034T20** for Washlet details

INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

Ultra-low high efficiency toilets require a system with adequate supplemental flows from other water usage fixtures and a 4" ID drainline with minimum 2% slope and maximum linear runs of 60ft

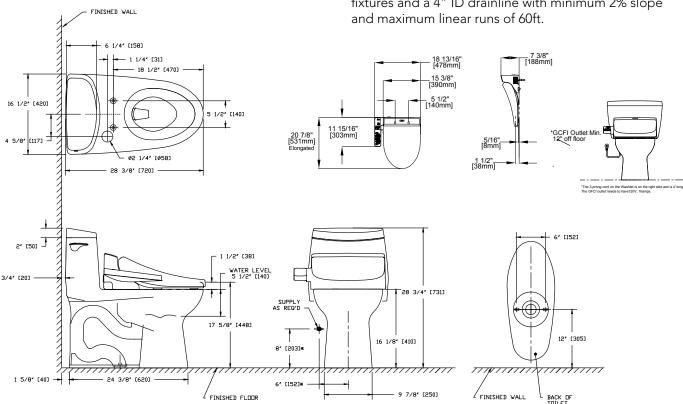

*SUGGESTED DIMENSIONS

TOTO®

RD-XXXXX, MW6042034CUFG, V.01