### TOTO<sub>®</sub>

## **MW604584CEFG**

UltraMax® II / WASHLET®+ S350e One-Piece Toilet - 1.28 GPF

#### **FEATURES**

- Concealed supply connection for seamless installation
- High-efficiency Tornado Flush® (1.28GPF/4.8LPF)
- CeFiONtect® glaze prevents debris from sticking to ceramic surfaces for easy cleaning
- Universal Height
- Elongated front bowl
- Decorative one-piece design with high-profile tank
- Chrome trip lever
- 12" Rough-in, less supply
- Auto open/close lid
- See spec sheet SW584T20 for Washlet features

#### **MODELS**

CST604CEFGT20 With CeFiONtect glaze

#### REQUIRED WASHLET CONNECT+

SW584T20 WASHLET®+ S350e Fits TOTO WASHLET+ toilet bowl models only

#### **COLORS/FINISHES**

 Standard #01 Cotton

#### PRODUCT SPECIFICATION

The one-piece high efficiency Tornado Flush toilet shall be 1.28GPF/4.8LPF.

Universal Height Toilet with CeFiONtect glaze finish. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever.

Toilet shall be TOTO Model CST604CEFGT20#01.

See TOTO Specification sheet **SW584T20** for details on required Washlet.



CeFiONtect

washlė́t<sub>®</sub>+



Tornado Flush

\_ewater+,

#### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)







### UltraMax® II / WASHLET®+ S350e One-Piece Toilet - 1.28GPF

#### **SPECIFICATIONS**

Water Use
Flush System
Min. Water Pressure
Water Surface
Trap Diameter
Rough-in
1.28 GPF/4.8LPF
Tornado Flush®
8 psi (static)
7-1/8" x 9-1/8"
2-1/8"
12"

Trap SealWarrantyZ-1/8"One Year Limited Warranty

Material Vitreous china
 Skinaia NAcialta CST/04CFFCT

 Shipping Weight CST604CEFGT20 99lbs. SW584T20 13.5lbs.

Shipping Dimensions CST604CEFGT20

32"L x 20"W x 17-3/4" H<sup>1</sup> x


28-3/4" H<sup>2</sup> SW584T20

23"X 19-1/4" X 5-1/2"

# INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

• See Spec sheet **SW584T20** for Washlet details

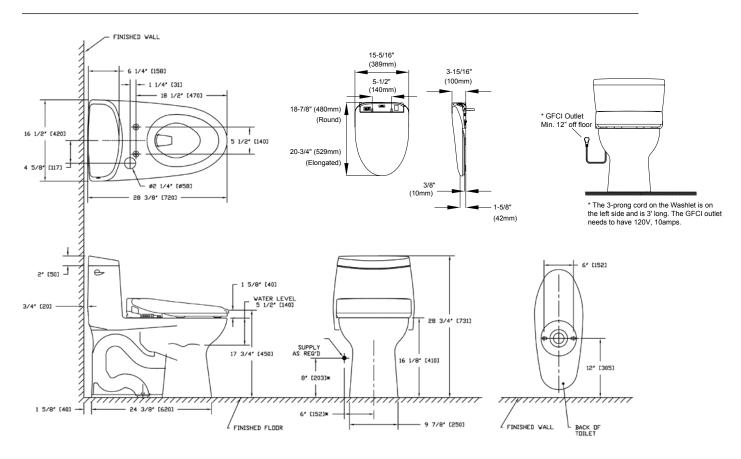

TOTO:

\*SUGGESTED DIMENSIONS

These dimensions and specifications are subject to change without notice